


Façade Support & Restraint
Windposts

Leviat®
A CRH COMPANY

Ancon Windposts and Masonry Reinforcement

Uk Edition

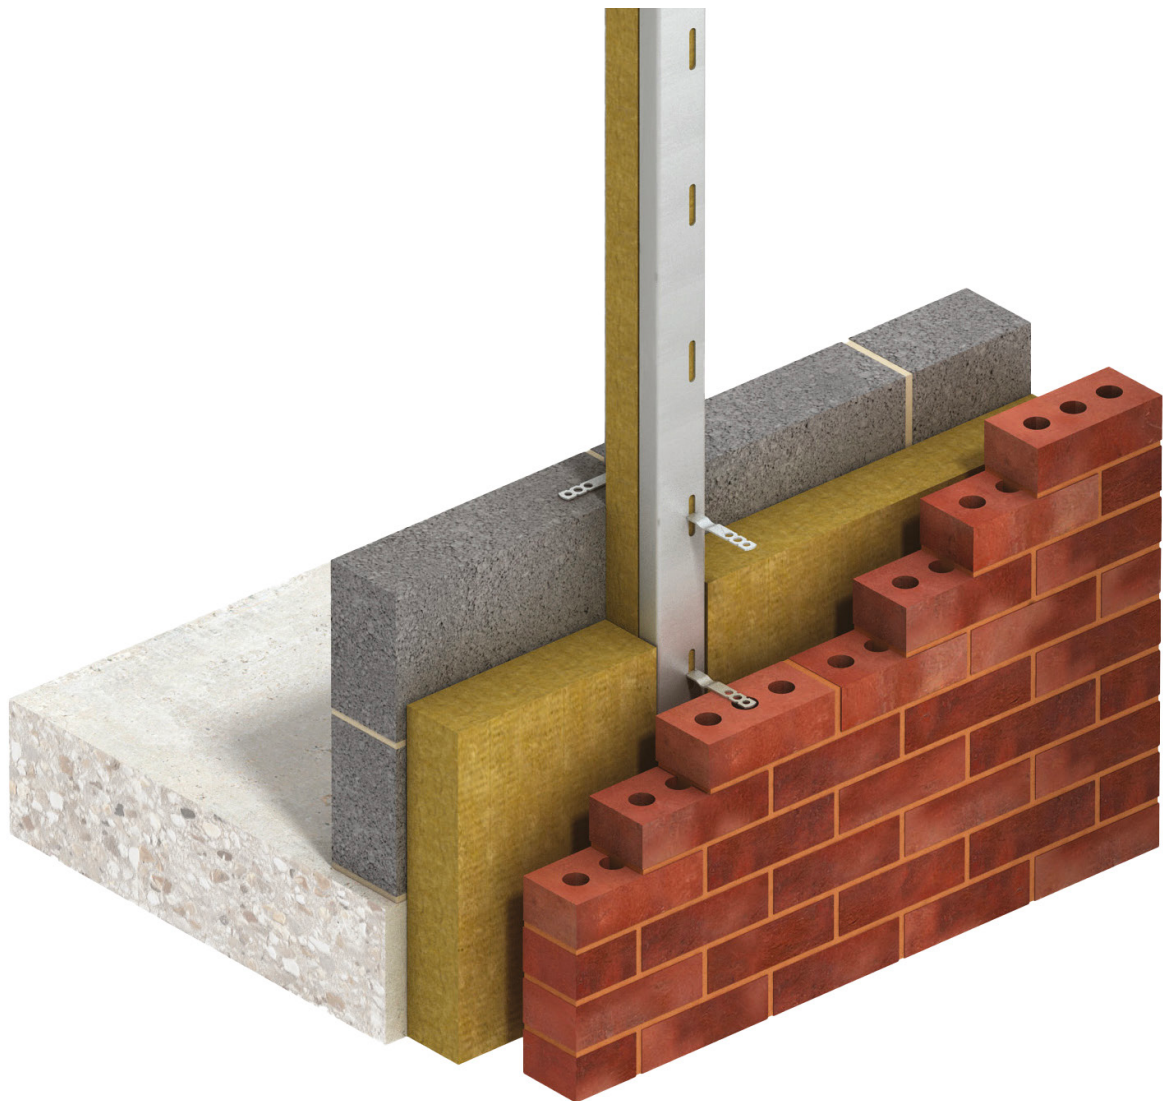

Imagine. Model. Make.



We imagine, model and make engineered products and innovative construction solutions that help turn architectural visions into reality and enable our construction partners to build better, safer, stronger and faster.

Leviat is a world leader in connecting, fixing, lifting and anchoring technology.

From the build of new schools, hospitals, homes and infrastructure, to the repair and maintenance of heritage structures, our engineering skills are making a difference around the world.


We provide technical design assistance at every stage of a project, from initial planning to installation and beyond.

Our technical support services range from simple product selection through to the development of a fully customised project-specific design solution.

Every promise we make locally, has the commitment and dedication of our global team behind it. We employ almost 3,000 people at 60 locations across North America, Europe and Asia-Pacific, providing an agile and responsive service worldwide.

Leviat, a CRH company, is part of the world's leading building materials business.




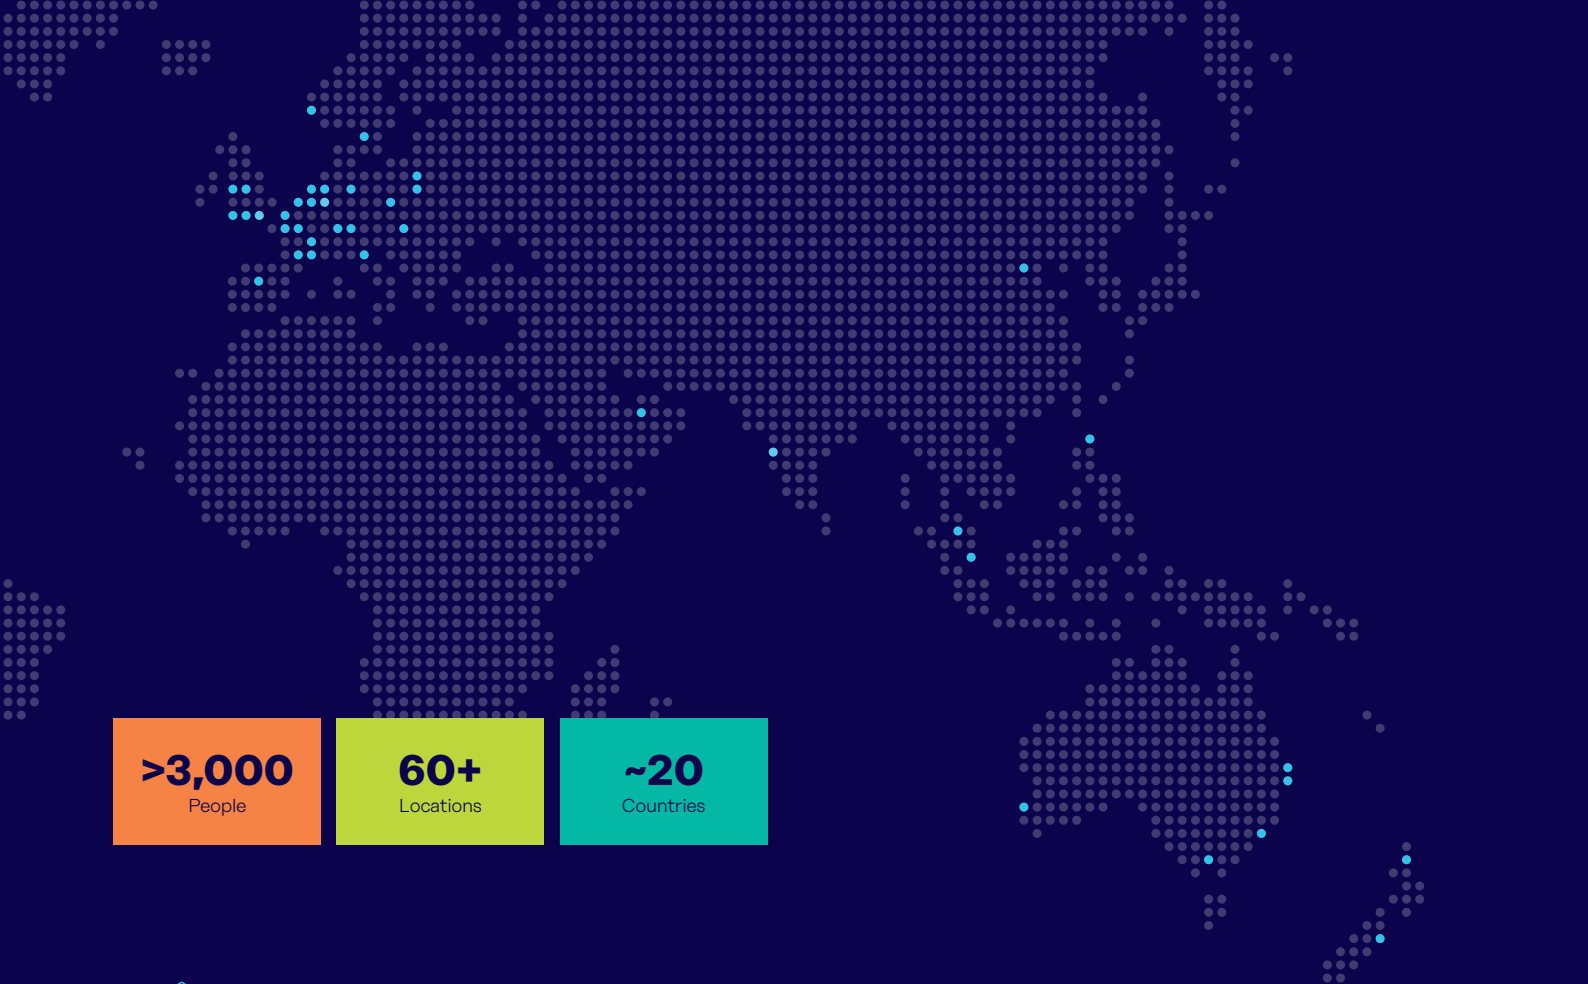

>3,000
People

60+
Locations

~20
Countries




Façade Support & Restraint

Systems for the safe and thermally-efficient fixing of the external building envelope, including brick and natural stone, insulated sandwich panels, curtain walling and suspended concrete façades, and also the repair and strengthening of existing masonry installations.


- Masonry Support Systems
- Windposts
- Lintels
- Brick Slip Systems
- Wall Ties & Restraints
- Masonry Reinforcement
- Natural Stone Façade Systems
- Cavity Trays
- Sandwich Panel anchor
- Suspended concrete façade
- Masonry Repair

Other areas of expertise:




Structural Connections

Systems to form robust, efficient connections, and continuity of concrete reinforcement as necessary, between walls, slabs, columns, beams and balconies, providing structural integrity as well as enhanced thermal and acoustic performance.



Lifting & Bracing

Systems for the safe and efficient transportation, lifting and temporary bracing of cast concrete elements and tilt-up panels before permanent structural connections are made.




Anchoring & Fixing

Systems for fixing secondary fixtures to concrete, including anchor channels, bolts and inserts; also tension rod systems for roofs and canopies.



Formwork & Site Accessories

Non-structural accessories that complement our engineered solutions and help keep your construction environment operating safely and efficiently, including moulds for casting standard and special concrete elements and construction essentials such as reinforcing bar spacers.



Industrial Technology

Mounting channels, pipe clamps and other versatile framing systems that provide safe fixing in a wide range of industrial applications.

Leviat product ranges:

Ancon | Aschwanden | Connolly | Halfen | Helifix | Isedio | Meadow Burke | Modersohn | Moment | Plaka | Scaldex | Thermomass

The Ancon Thermal Windpost (TWP2)

The patented Ancon Thermal Windpost (TWP2) is designed to span vertically between floors, to provide additional lateral support for panels of masonry. It has been engineered after extensive

research and testing, with a variety of features to improve the thermal performance and repeatability of the junction.

Why is the Thermal Windpost revolutionary?

The first of its kind, and beneficial for both contractors and designers alike, the Thermal Windpost has been designed unlike any other windpost seen on the market.


Thanks to its robust integral non-combustible mineral fibre insulation in combination with a thermal slot array, using the Thermal Windpost in place of a traditional windpost results in up to **70% reduction** in thermal transmission through the span of the section, as well as improving the consistency and repeatability of fitting insulation in and around the post, ensuring that the intended thermal design is met.

Although it holds the same strong performance, the Thermal Windpost is engineered to be up to **35% lighter** than traditional windposts, making it much easier to handle on site. With sharp edges eliminated, safety on site is also improved.


An **additional flange** means insulation can be installed directly up to the windpost with ease. The outer face of the post has been designed to sit flush with the face of partial fill insulation, providing a **continuous insulation line** and improving airtightness.

Supplied with robust **integral non-combustible mineral fibre insulation** packed behind the flange, ensuring there are **no gaps or voids** and complete continuity of the insulation layer is achieved.

A **teardrop hem** increases the strength of the post and **eliminates sharp edges**.




The **perforated long leg** means the overall path for thermal energy to travel is longer, thus increasing its effective resistance.

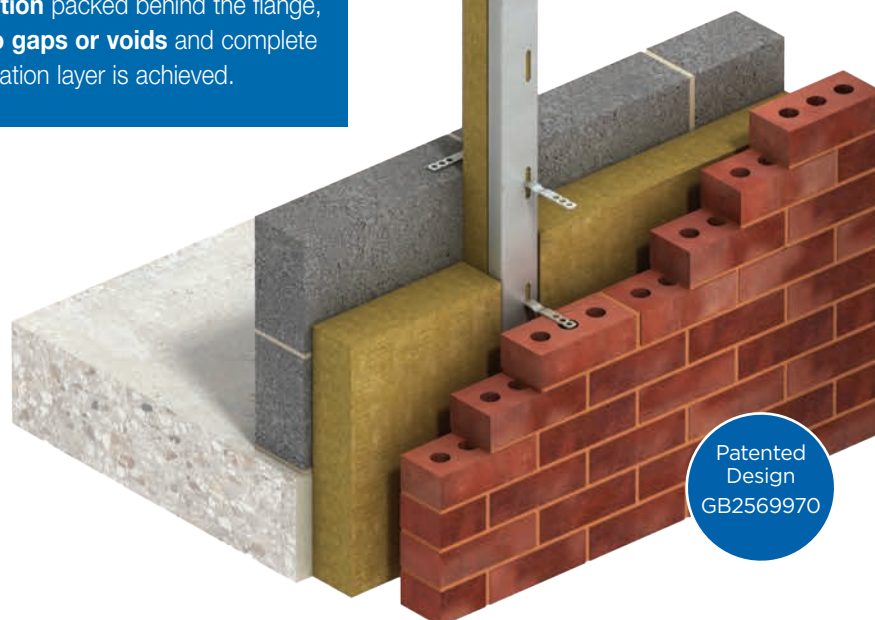


Patented
Design
GB2569970

Minimising thermal transmission

The use of thinner gauge stainless steel reduces the amount of highly conductive material penetrating the insulation layer. The additional inclusion of a thermal slot array within the insulation zone slows the rate of thermal flux locally and in turn further reduces transmission through that part of the web. This is particularly efficient when fully surrounded by insulation.

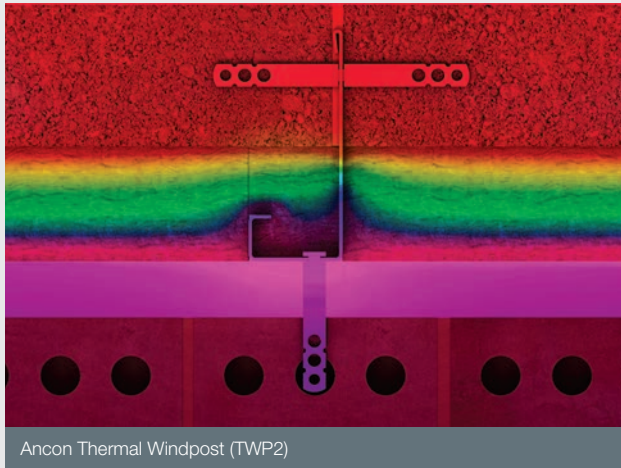

Ancon Thermal Windpost (TWP2)

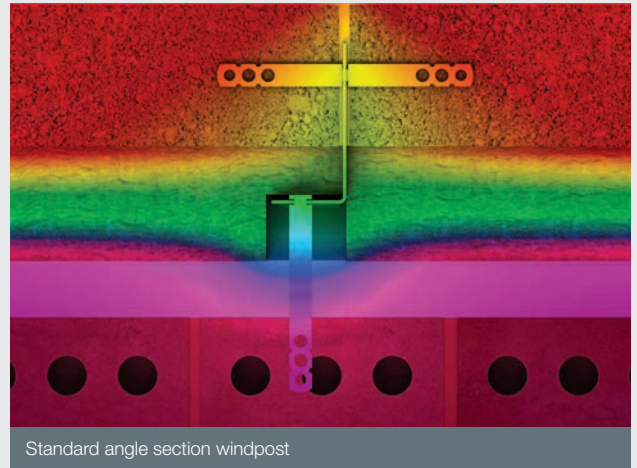


Standard angle section windpost

Ensuring repeatability

Gaps between the cavity insulation panels and the post have a detrimental effect on the thermal performance of the junction. The inclusion of a folded return on the flange ensures that there is a perpendicular face on both sides of the post to butt insulation up to. Integrated mineral wool insulation within the flange is held in place by this fold, eliminating the need to push insulation in to tight spaces and preventing omission of this crucial, yet tricky to install, insulation on-site. This repeatability helps ensure that the thermal performance of the post is maximised and consistently meets expectations.

Innovative detailing

Alignment of the flange with the outer face of the insulation layer promotes a clean insulation line without protrusions or recesses local to the post, and in the case of foil-backed insulation, provides a face to tape the insulation to. Specifying the depth of the post in this way also means that different structural needs can in many cases be met with the same depth of post, simply increasing the gauge of material to the level necessary to meet structural requirements. This ensures that the detailing of insulation surrounding the post is standardised as far as possible across the project, in turn reducing the potential for on-site variations.

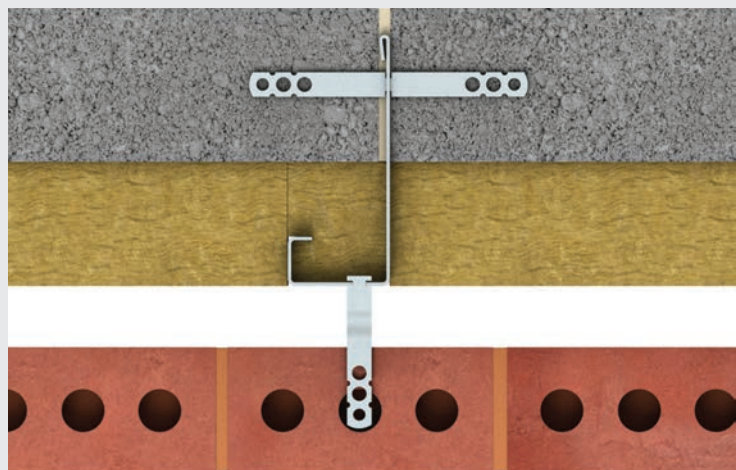

Ancon Thermal Windpost (TWP2)

The importance of thermal specification

An increasing focus on thermal bridging and energy efficiency means that components now have to go above and beyond in order to achieve the often tight thermal specification requirements. Windposts are structural members which inevitably create a discontinuity in the insulation layer; Angle sections almost fully penetrate the inner leaf of the wall and part of the insulation, and channel sections can sometimes bridge the insulation layer. The small voids that are created within and around the post as a result of this can be

difficult and time consuming to appropriately deal with on-site, and ultimately can have a detrimental impact on the overall thermal performance of the masonry wall.

The focus on development of the Thermal Windpost was to address this thermal performance issue, as well as offering a solution which simplifies installation, ensuring that a consistent and correct install can be achieved.


Thermal Windposts offer up to 70% reduction in thermal transmission through the span of

the post as compared to equivalent traditional angle section windposts. Ψ -values for the Thermal Windpost section range between 0.04-0.06W/mK, compared to 0.13-0.19W/mK for traditional WP2 posts*.


This means that they can help satisfy more demanding thermal requirements, or be used in builds where stringent thermal specifications are required.

Please contact Leviat for further details.

Ancon Thermal Windpost (TWP2)

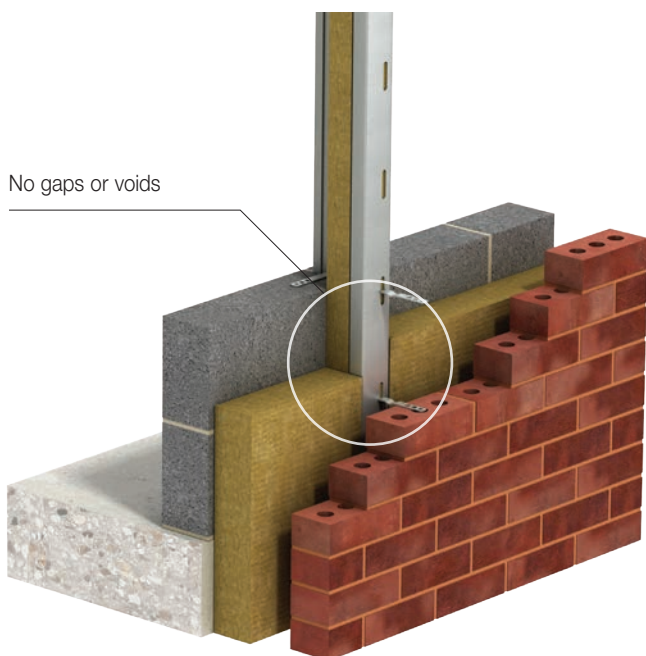

Standard angle section windpost

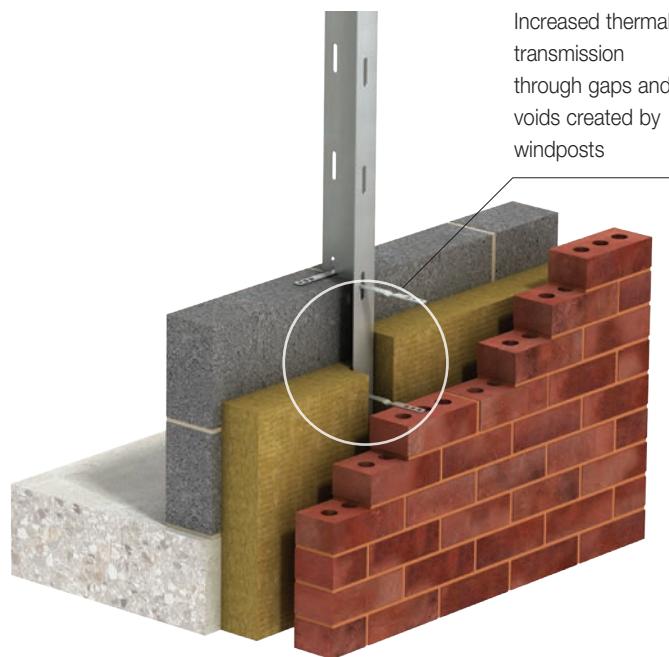

Achieving the default Ψ -value

The default Ψ -value for windposts provided in BR 443 is 0.18W/mK. Analysis by Leviat* has shown that in some cases this can be exceeded with traditional angle section windposts, particularly if small gaps are present between insulation panels and the post, or if insulation behind the flange is omitted. In typical windpost installations, small gaps and voids created by the windpost are


easy to overlook in terms of both detailing and installation and can lead to increased thermal transmission which may not be accounted for in the thermal design, contributing to the widely accepted "performance gap" in thermal specification. The Ancon Thermal Windpost (TWP2) eliminates this risk by ensuring a very low Ψ -value through the section as a baseline, providing integral insulation within

the flange, and providing consistent detailing for surrounding insulation. This ensures the default value is always met as a minimum, and provides opportunities for improved thermal performance to be realised.

*Analysis based upon a wall build-up comprising 75mm phenolic partial-fill insulation in a 125mm cavity, with insulation hard up to each side of the post. For further details contact Leviat.

Comparison between TWP2 and WP2 in sensitivity to gaps and variations in installation of insulation adjacent to the post

(Assumes 75mm partial fill insulation and insulation installed behind the flange)

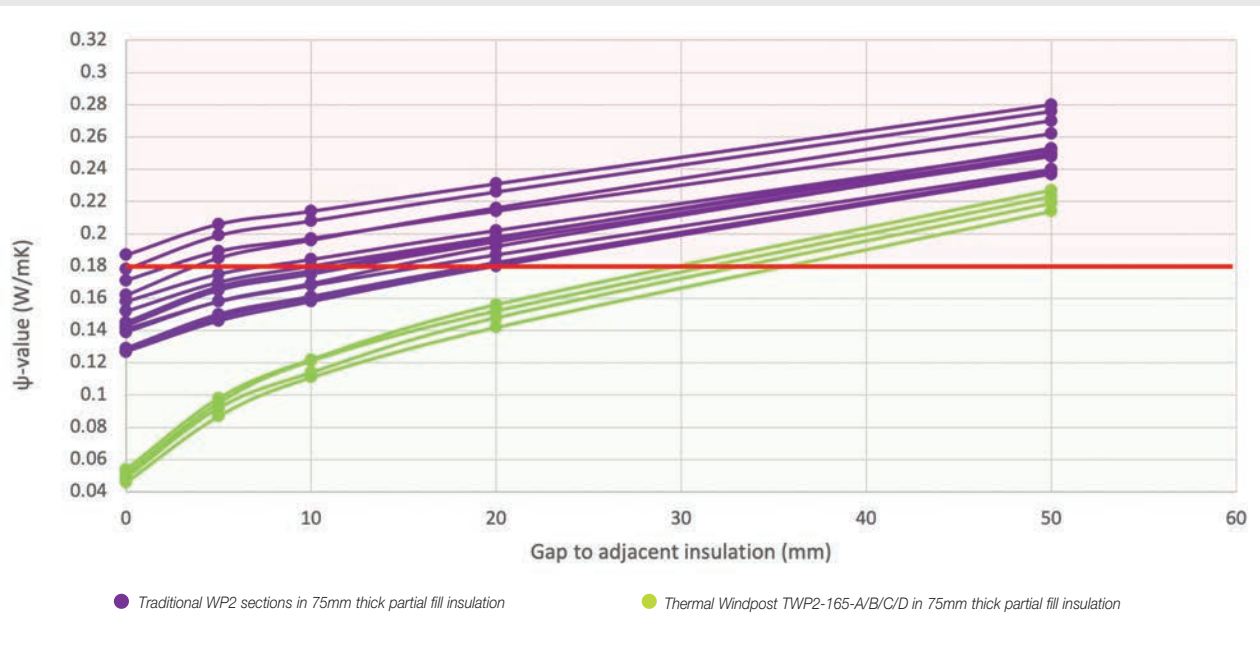

The Thermal Windpost (TWP2) is much less sensitive to variations, maintaining performance better than the default value of 0.18W/mK irrespective of minor variations.

Design and Installation

Thermal Windposts are installed into the inner leaf of blockwork in a similar way to traditional angle sections but with the flange aligned with the outer face of partial fill insulation, and are designed to suit your specific construction and load conditions.

Thermal windposts are restrained by the blockwork and designed as 'simply supported beams'. Deflection under wind load sometimes limits the maximum loading, however due to the optimised nature of the section many TWP2 sections have a greater reliance on mechanical strength which is an indicator of section efficiency. Connections to the frame are designed to permit adjustment during installation. Serrated surfaces will be provided where adjustment is in the direction of the

load. The top connection allows for shrinkage or vertical movement of the frame to take place. The type of fixing will depend on the nature of the frame. Expansion bolts are normally supplied for concrete frames and set screws will be supplied for steel frames.

For further information or advice on specific applications, please contact our Technical Services Team.

Please note, it is the responsibility of the Engineer to design a suitable structure for connecting a windpost. Where windposts are to be connected to a concrete frame, the project Structural Engineer should advise the concrete grade. Windpost connections will be designed for grade C30/37 cracked concrete, unless advised otherwise.

Details for Specification and Ordering

The Ancon Thermal Windpost (TWP2) has been independently assessed by the Steel Construction Institute, and is UKCA and CE marked, designed to BS EN 1993 (EC3) and manufactured to BS EN 1090-1.

Ancon Windposts are designed to suit specific construction and load conditions, and as a result they are manufactured to order therefore sufficient time should be allowed for the design, approval and manufacturing process when placing orders for windposts.



Ancon Thermal Windpost (TWP2)

Load Capacity Tables (for posts built in to a solid mortar joint)

Ancon Windposts are designed as 'simply supported beams' with a maximum deflection of span/360. The tables below include examples of the Ancon Thermal Windposts maximum design loads to BS EN 1993 (Eurocode 3) when built in to a mortar joint. The design resistances shown should be compared to factored loads.

Ancon Windposts comply with all UKCA & CE marking requirements of BS EN 1090-1, including designs to EN 1993 (Eurocode 3) and external certification of our factory production controls by an approved body. Design methods have been independently assessed and verified by the Steel Construction Institute.

Instructions for Lookup Table

The tables and charts on the following pages help determine the appropriate Ancon Thermal Windpost and exact product specification for your project.

Identify the relevant cavity size or insulation thickness to determine the Post Depth (h) in the left hand column of the table.

Follow the row across to find your required post length and then use the table to determine the Design Resistance required. This will give you your Windpost Type e.g. Type A, Type B etc.

Ancon Thermal Windpost (TWP2) Product Specification Structure

TWP2-	190-	B
Standard Code	Post Depth (h)	Design Capacity (see table)

Post Depth (h)	Partial fill insulation thickness*	Cavity size or full fill insulation thickness	Windpost Type	Design resistance per post (kN ULS, uniformly distributed) various spans						
				2.5m	2.75m	3.0m	3.25m	3.5m	3.75m	4.0m
165	75	125	Type A	7.08	7.08	6.48	5.82	5.24	4.71	4.25
			Type B	11.43	10.20	9.06	8.06	7.17	6.41	5.75
			Type C	14.96	13.17	11.60	10.23	9.04	8.04	7.19
			Type D	18.44	16.08	14.06	12.33	10.88	9.63	8.57
170	80	130	Type A	7.07	7.07	6.86	6.18	5.58	5.03	4.55
			Type B	12.06	10.80	9.63	8.58	7.67	6.86	6.15
			Type C	15.84	14.00	12.36	10.92	9.69	8.63	7.71
			Type D	19.58	17.15	15.03	13.20	11.66	10.34	9.21
175	85	135	Type A	7.03	7.03	7.03	6.56	5.93	5.36	4.85
			Type B	12.66	11.42	10.22	9.13	8.18	7.32	6.59
			Type C	16.74	14.85	13.16	11.66	10.37	9.24	8.27
			Type D	20.76	18.24	16.04	14.13	12.50	11.10	9.90
180	90	140	Type A	7.02	7.02	7.02	6.92	6.27	5.69	5.16
			Type B	12.63	12.03	10.82	9.69	8.69	7.80	7.02
			Type C	17.64	15.72	13.97	12.42	11.06	9.87	8.83
			Type D	21.96	19.37	17.07	15.08	13.35	11.87	10.61
185	95	145	Type A	6.99	6.99	6.99	6.99	6.63	6.03	5.48
			Type B	12.62	12.62	11.42	10.26	9.23	8.30	7.48
			Type C	18.56	16.59	14.79	13.19	11.76	10.52	9.44
			Type D	23.16	20.51	18.12	16.04	14.24	12.68	11.34
190	100	150	Type A	6.98	6.98	6.98	6.98	6.98	6.38	5.81
			Type B	12.59	12.59	12.02	10.85	9.77	8.80	7.95
			Type C	19.46	17.48	15.63	13.97	12.48	11.19	10.05
			Type D	24.36	21.65	19.20	17.03	15.14	13.50	12.09
195	105	155	Type A	6.96	6.96	6.96	6.96	6.96	6.72	6.14
			Type B	12.56	12.56	12.56	11.43	10.32	9.32	8.43
			Type C	19.62	18.36	16.49	14.76	13.23	11.87	10.68
			Type D	24.76	22.82	20.28	18.05	16.07	14.36	12.87
200	110	160	Type A	6.93	6.93	6.93	6.93	6.93	6.93	6.47
			Type B	12.53	12.53	12.53	12.02	10.88	9.86	8.93
			Type C	19.59	19.25	17.34	15.57	13.98	12.57	11.33
			Type D	24.76	23.99	21.39	19.07	17.03	15.23	13.67
205	115	165	Type A	6.92	6.92	6.92	6.92	6.92	6.92	6.81
			Type B	12.50	12.50	12.50	12.50	11.45	10.38	9.42
			Type C	19.56	19.56	18.20	16.40	14.75	13.29	11.99
			Type D	24.76	25.16	22.52	20.12	18.00	16.13	14.49
210	120	170	Type A	6.89	6.89	6.89	6.89	6.89	6.89	6.89
			Type B	12.47	12.47	12.47	12.47	12.02	10.92	9.93
			Type C	19.53	19.53	19.07	17.22	15.53	14.01	12.66
			Type D	24.76	26.34	23.66	21.20	18.99	17.04	15.33
215	125	175	Type A	6.87	6.87	6.87	6.87	6.87	6.87	6.87
			Type B	12.45	12.45	12.45	12.45	12.45	11.48	10.46
			Type C	19.49	19.49	19.49	18.06	16.32	14.76	13.37
			Type D	24.76	27.02	24.80	22.28	20.00	17.99	16.20
220	130	180	Type A	6.86	6.86	6.86	6.86	6.86	6.86	6.86
			Type B	12.42	12.42	12.42	12.42	12.42	12.03	10.98
			Type C	19.46	19.46	19.46	18.90	17.13	15.51	14.07
			Type D	24.76	27.02	25.95	23.37	21.03	18.93	17.09
225	135	185	Type A	6.83	6.83	6.83	6.83	6.83	6.83	6.83
			Type B	12.39	12.39	12.39	12.39	12.39	12.39	11.52
			Type C	19.43	19.43	19.43	19.43	17.94	16.29	14.79
			Type D	24.76	27.02	27.11	24.48	22.07	19.91	17.99
230	140	190	Type A	6.81	6.81	6.81	6.81	6.81	6.81	6.81
			Type B	12.36	12.36	12.36	12.36	12.36	12.36	12.06
			Type C	19.40	19.40	19.40	19.40	18.77	17.06	15.53
			Type D	24.76	27.02	27.89	25.59	23.13	20.90	18.92
235	145	195	Type A	6.78	6.78	6.78	6.78	6.78	6.78	6.78
			Type B	12.33	12.33	12.33	12.33	12.33	12.33	12.33
			Type C	19.35	19.35	19.35	19.35	19.35	17.85	16.26
			Type D	24.76	27.02	27.84	26.72	24.20	21.92	19.86
240	150	200	Type A	6.77	6.77	6.77	6.77	6.77	6.77	6.77
			Type B	12.30	12.30	12.30	12.30	12.30	12.30	12.30
			Type C	19.32	19.32	19.32	19.32	19.32	18.65	17.03
			Type D	24.76	27.02	27.81	27.81	25.29	22.94	20.82

* Post may be used in full-fill applications, or in thicker partial fill insulation with a 50mm make-up piece of insulation to the front of the post.
Contact Leviat for further information.

Figures in red are limited by wall tie capacity. Please contact Leviat for capacities within a movement joint.

Design Charts for the Built in Case


The charts below provide loading information for four popular partial fill insulation thicknesses to aid specification. Leviat can provide custom charts for a given depth on request, please contact our Technical Services Team for more information.

	2.5m	2.75m	3.0m	3.25m	3.5m	3.75m	4.0m
A	7.08	7.08	6.48	5.82	5.24	4.71	4.25
B	11.43	10.20	9.06	8.06	7.17	6.41	5.75
C	14.96	13.17	11.60	10.23	9.04	8.04	7.19
D	18.44	16.08	14.06	12.33	10.88	9.63	8.57

	2.5m	2.75m	3.0m	3.25m	3.5m	3.75m	4.0m
A	6.87	6.87	6.87	6.87	6.87	6.87	6.87
B	12.45	12.45	12.45	12.45	12.45	11.48	10.46
C	19.49	19.49	19.49	18.06	16.32	14.76	13.37
D	24.76	27.02	24.80	22.28	20.00	17.99	16.20


Limited by wall ties

Post Depth = 165mm (Typically 75mm partial fill insulation)

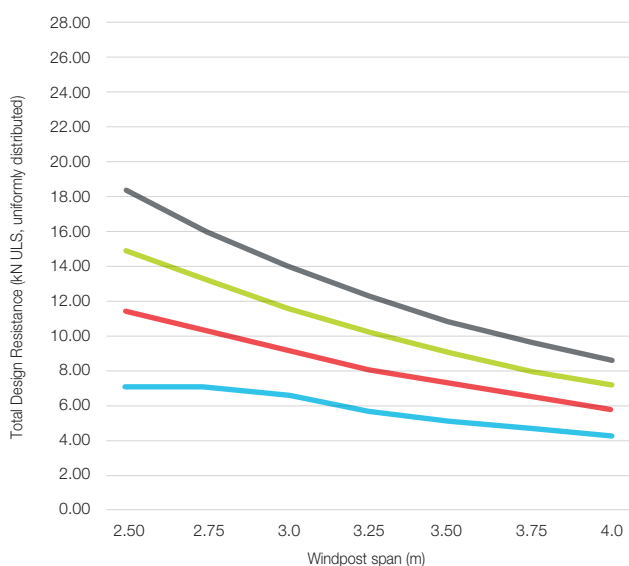

	2.5m	2.75m	3.0m	3.25m	3.5m	3.75m	4.0m
A	6.98	6.98	6.98	6.98	6.98	6.38	5.81
B	12.59	12.59	12.02	10.85	9.77	8.80	7.95
C	19.46	17.48	15.63	13.97	12.48	11.19	10.05
D	24.36	21.65	19.20	17.03	15.14	13.50	12.09


Post Depth = 190mm (Typically 100mm partial fill insulation)

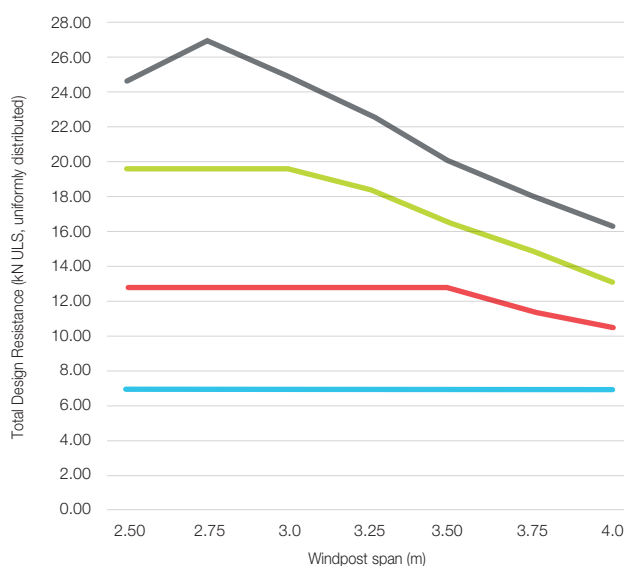

	2.5m	2.75m	3.0m	3.25m	3.5m	3.75m	4.0m
A	6.77	6.77	6.77	6.77	6.77	6.77	6.77
B	12.30	12.30	12.30	12.30	12.30	12.30	12.30
C	19.32	19.32	19.32	19.32	19.32	18.65	17.03
D	24.76	27.02	27.81	27.81	25.29	22.94	20.82


Limited by wall ties

Post Depth = 215mm (Typically 125mm partial fill insulation)

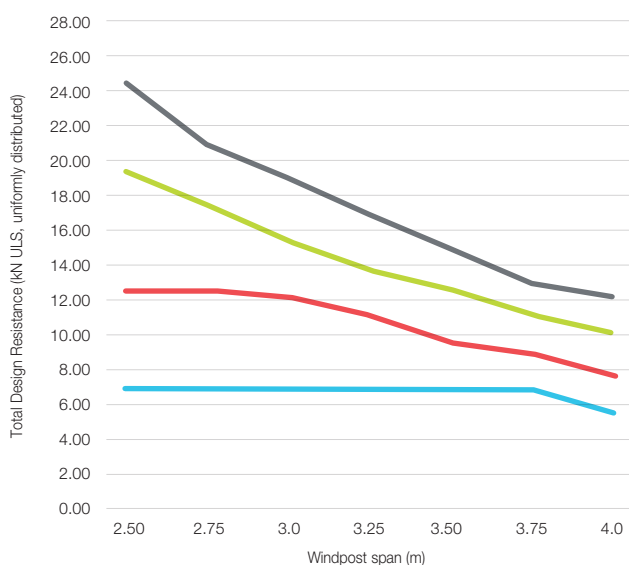

	2.5m	2.75m	3.0m	3.25m	3.5m	3.75m	4.0m
A	6.77	6.77	6.77	6.77	6.77	6.77	6.77
B	12.30	12.30	12.30	12.30	12.30	12.30	12.30
C	19.32	19.32	19.32	19.32	19.32	18.65	17.03
D	24.76	27.02	27.81	27.81	25.29	22.94	20.82

Post Depth = 240mm (Typically 150mm partial fill insulation)

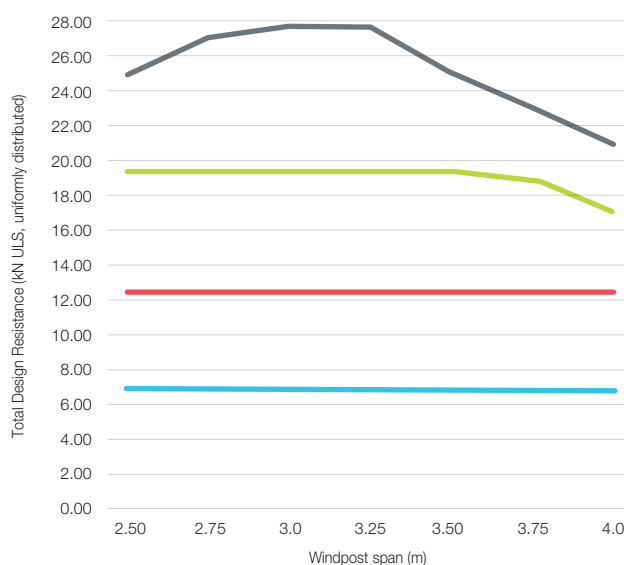

	2.5m	2.75m	3.0m	3.25m	3.5m	3.75m	4.0m
A	6.77	6.77	6.77	6.77	6.77	6.77	6.77
B	12.30	12.30	12.30	12.30	12.30	12.30	12.30
C	19.32	19.32	19.32	19.32	19.32	18.65	17.03
D	24.76	27.02	27.81	27.81	25.29	22.94	20.82



Leviat®

A CRH COMPANY

Innovative engineered products
and construction solutions that
allow the industry to build safer,
stronger and faster.



Contact Leviat worldwide

Australia

98 Kurrajong Avenue,
Mount Druitt, Sydney, NSW 2770
Tel: +61 - 2 8808 3100
Email: info.au@leviat.com

Austria

Leonard-Bernstein-Str. 10
Saturn Tower, 1220 Wien
Tel: +43 - 1 - 259 6770
Email: info.at@leviat.com

Belgium

Industrielaan 2
1740 Ternat
Tel: +32 - 2 - 582 29 45
Email: info.be@leviat.com

China

Room 601 Tower D,
Vantone Centre
No. A6 Chao Yang Men Wai Street
Chaoyang District
Beijing P.R. China 100020
Tel: +86 - 10 5907 3200
Email: info.cn@leviat.com

Czech Republic

Business Center Šafránková
Šafránková 1238/1
155 00 Praha 5
Tel: +420 - 311 - 690 060
Email: info.cz@leviat.com

Finland

Vädursgatan 5
412 50 Göteborg / Sweden
Tel: +358 (0)10 6338781
Email: info.fi@leviat.com

France

6, Rue de Cabanis
FR 31240 L'Union
Toulouse
Tel: +33 - 5 - 34 25 54 82
Email: info.fr@leviat.com

Germany

Liebigstrasse 14
40764 Langenfeld
Tel: +49 - 2173 - 970 - 0
Email: info.de@leviat.com

India

309, 3rd Floor
Orion Business Park
Ghodbunder Road
Kapurbawdi, Thane West,
Thane, Maharashtra 400607
Tel: +91 - 22 2589 2032
Email: info.in@leviat.com

Italy

Via F.lli Bronzetti 28
24124 Bergamo
Tel: +39 - 035 - 0760711
Email: info.it@leviat.com

Malaysia

28 Jalan Anggerik Mokara 31/59
Kota Kemuning,
40460 Shah Alam Selangor
Tel: +603 - 5122 4182
Email: info.my@leviat.com

Netherlands

Oostermaat 3
7623 CS Borne
Tel: +31 - 74 - 267 14 49
Email: info.nl@leviat.com

New Zealand

2/19 Nuttall Drive, Hillsborough,
Christchurch 8022
Tel: +64 - 3 376 5205
Email: info.nz@leviat.com

Norway

Vestre Svanholmen 5
4313 Sandnes
Tel: +47 - 51 82 34 00
Email: info.no@leviat.com

Philippines

2933 Regus, Joy Nostalg,
ADB Avenue, Ortigas Center
Pasig City
Tel: +63 - 2 7957 6381
Email: info.ph@leviat.com

Poland

Ul. Obornicka 287
60-691 Poznań
Tel: +48 - 61 - 622 14 14
Email: info.pl@leviat.com

Singapore

14 Benoi Crescent
Singapore 629977
Tel: +65 - 6266 6802
Email: info.sg@leviat.com

Spain

Polígono Industrial Santa Ana
c/ Ignacio Zuloaga, 20
28522 Rivas-Vaciamadrid
Tel: +34 - 91 632 18 40
Email: info.es@leviat.com

Sweden

Vädursgatan 5
412 50 Göteborg
Tel: +46 - 31 - 98 58 00
Email: info.se@leviat.com

Switzerland

Grenzstrasse 24
3250 Lyss
Tel: +41 (0)800 22 66 00
Email: info.ch@leviat.com

United Arab Emirates

RA08 TB02, PO Box 17225
JAFZA, Jebel Ali, Dubai
Tel: +971 (0)4 883 4346
Email: info.ae@leviat.com

United Kingdom

President Way,
President Park,
Sheffield S4 7UR
Tel: +44 - 114 275 5224
Email: info.uk@leviat.com

USA / Canada

6467 S Falkenburg Road
Riverview, FL 33578
Tel: (800) 423-9140
Email: info.us@leviat.us

For countries not listed
Email: info@leviat.com

Notes regarding this document

© Protected by copyright. The information in this publication is based on state-of-the-art technology at the time of publication. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Leviat shall not accept liability for the accuracy of the information in this document or for any printing errors. We reserve the right to make technical and design changes at any time. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.

