


## HD-32 Stop Coupler

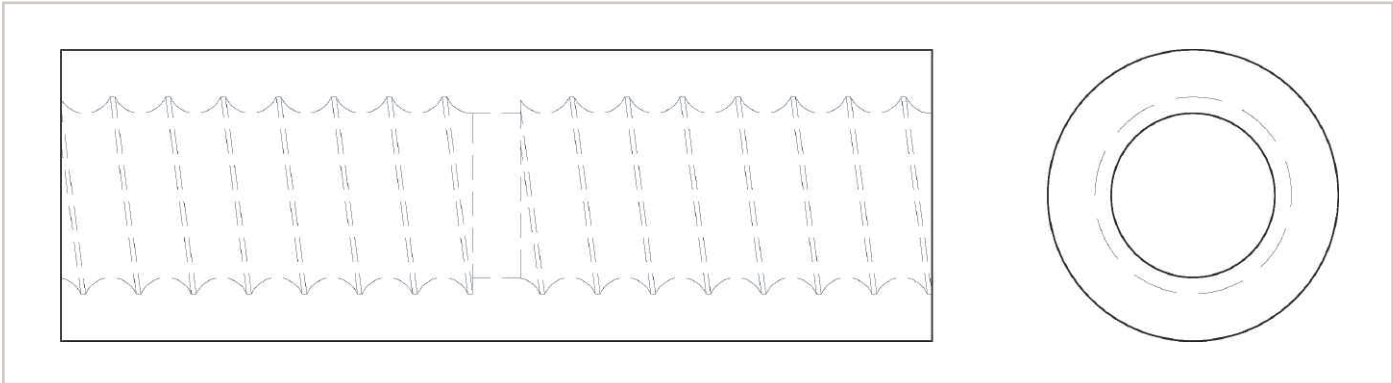

HD-32 STOP COUPLER DATA			
Thread Diameter	D	L	Safe Work Load (lbs)
1/2"	3/4"	2-1/2"	9,000
3/4"	1-1/16"	3"	18,000
1"	1-1/2"	4-1/2"	38,000

Safe working loads are based on an approximate 2:1 safety factor.

The HD-32 Stop Coupler has coil threads tapped from each end creating a stop in the middle. Coil Rods or Inside Rods must be threaded to the internal stop in order to achieve the listed safe working loads.

