

Lifting & Bracing
Precast Lifting

Leviat[®]
A CRH COMPANY

MB DB-1LK Locking Klaw

DogBone Lifting Clutch




Overview

The MB DB-1LK Locking Klaw is a strong, safe and lightweight lifting clutch. The Locking Klaw's unique "locking well" prevents the Locking Klaw from rotating during the lifting process and ensures that the anchor head is always in the optimum position at the back of the slot.

- **Safe & Versatile:** The MB DB-1LK Locking Klaw safely connects in any direction, toward or away from the tail. The symmetrical chain link design centers the load and reduces hook, line and shackle damage. The MB DB-1LK Locking Klaw suits all spherical head anchors.

Features

- **Tested:** The MB DB-1LK Locking Klaw subject to an extensive and regular external and internal quality control process. The safe working loads provide an approximate 5:1 safety factor.

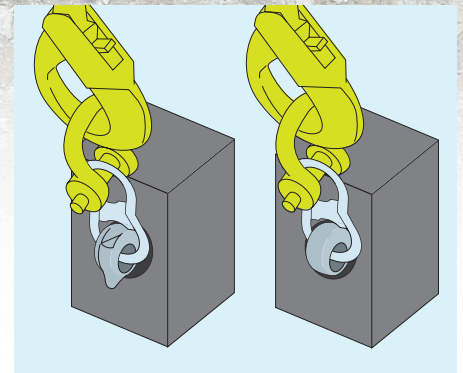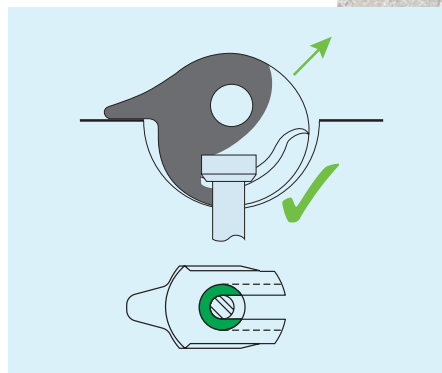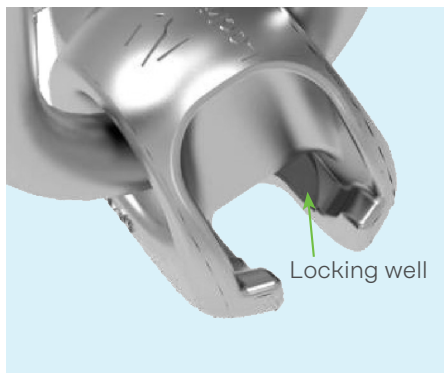

MB DB-1LK Locking Klaw

DogBone Lifting Clutch

Dimensions – MB DB-1LK Locking Klaw

Item Number	Lifting Body Mark	Safe Work Load			W	L	Sw	Cw	Ch	SI	S
MB590194	01LK	1 Ton	2,000 lbs	8.9 kN	2.599"	6.693"	1.299"	1.575"	1.732"	2.835"	0.433"
MB590196	02LK	2 Ton	4,000 lbs	17.8 kN	3.228"	8.465"	1.654"	1.969"	1.969"	3.465"	0.630"
MB590197	05LK	4 Ton	8,000 lbs	35.6 kN	4.331"	10.630"	2.244"	2.756"	2.441"	4.449"	0.866"
MB590198	10LK	8 Ton	16,000 lbs	71.1 kN	4.709"	14.370"	2.874"	3.543"	3.268"	5.669"	1.220"
MB590199	20LK	16 Ton	32,000 lbs	142.2 kN	6.929"	21.969"	4.331"	2.992"	4.724"	7.677"	1.535"

